


Scale:

Shaft cutout sizes

Clear space required for lift unit not in a shaft by others


Door front cutout sizes		
Landing	Width	Height
B1	940	2350
B2	940	2350
B3	940	2350
B4	940	2350

D

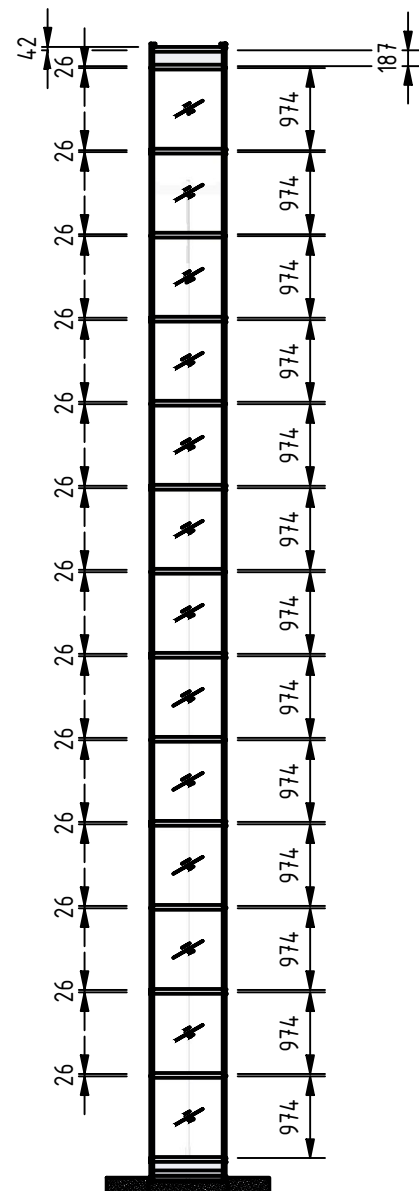


E-E

Shaft cutout dimension

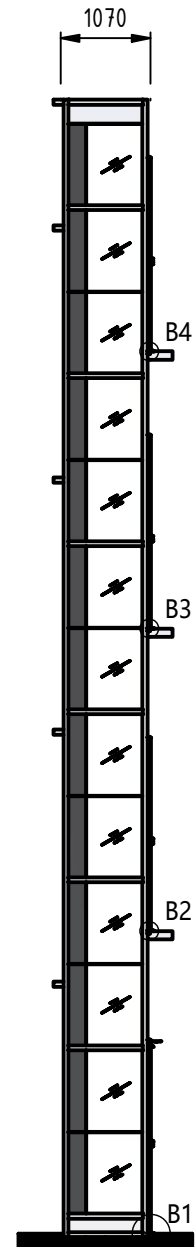


C


Shaft cutout dimension

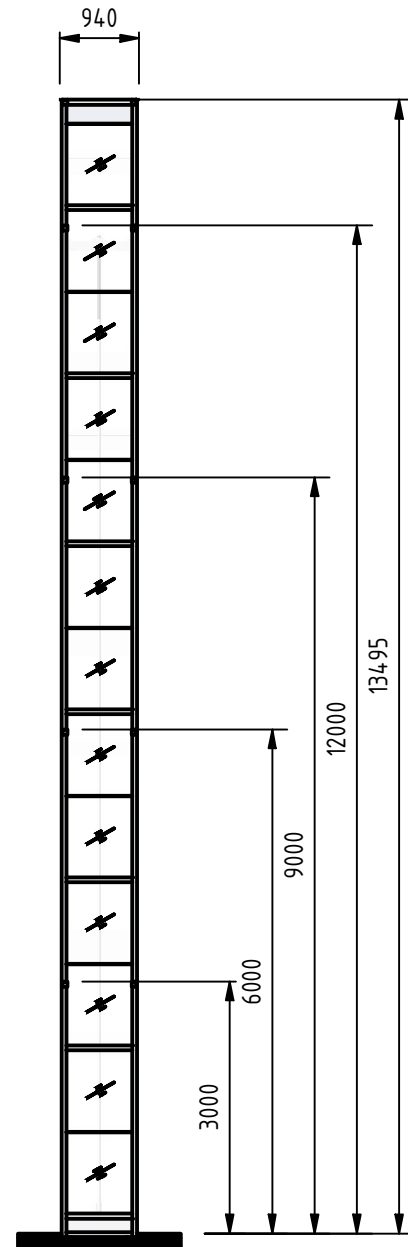


D

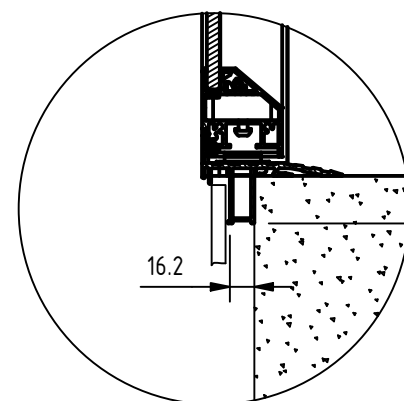

B2 B3 B4 (10: 1)

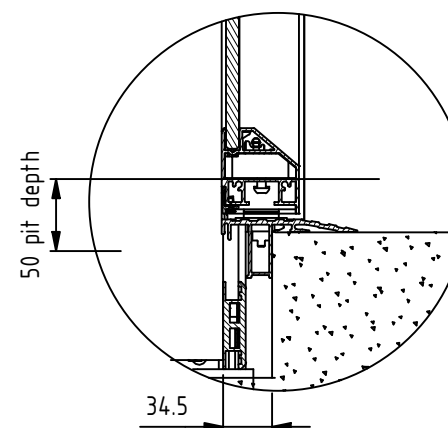

B1 (10: 1)

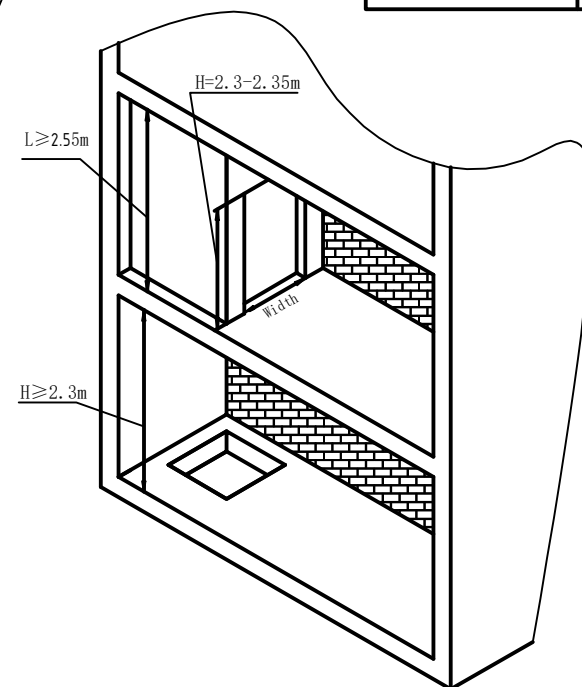

Incoming power supply is connected at landing:

For wiring and power supply, refer to the unit's wiring diagrams.

Ceiling shaft lighting, is independent from the power cable and pulled back into the trench's upper part. Shaft lighting > 50 lux.

NOTE! An effective emergency telephone is required for approved inspection. The purchaser is responsible for an active phone line being present prior to the lift installation.

The incoming telephone line is connected to CiLow (TELE). Refer to wiring diagram.

The emergency signal device is powered by the lift's own battery in the event of a power failure.


The lift must be equipped with a two-way communication, either via the standard telephone or via the lift telephone, which automatically calls the alarm control center or the like.

NOTE! A lift featuring a frequency converter cannot be directly connected to a RCD.

NOTE! If the elevator contains a CIBES glass shaft, the reserved dimension of the shaft shall not be 10mm larger than the specified reserved dimension, otherwise, there will be a risk that the cosmetic closing strip cannot be installed.

B

A

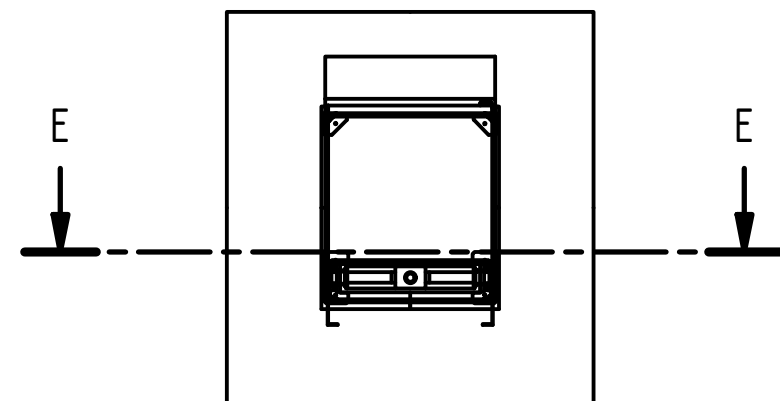

Approved by
builder:

European view placement:



EOS ID
Tender no
L00028874
Order no

Gen. Tolerances
SS-ISO 27681-1 M

Principal drawing
X50Standard-1000*900
Platform-635*850
XS1

Date
2026-09-23
sheet
2 of 6
Scale:

D

C

B

A

